

alkitronic[®]

HOME OF TORQUE POWER

alkitronic

VELOX

Electric Hydraulic Pump



Applications

- alkitronic® VELOX is a robust, long-life quality product made in Germany.
- This unique electrical hydraulic pump (protection class IP65) is protected against rain, splash water and dust deposit to eliminate costly downtime.
 - Its suitable for 110 V or 230 V main grids and voltage- controlled mobile power units.

Advantages

- High precision ($\pm 3\%$) through all pressure ranges, defined by precisely adapted oil flow rate.
- Air cooling, robust design, low weight. The housing design ensures optimum heat dissipation.
- Simple operating: one-push-button remote control for ergonomic, working convenience and distance safety.
- High working speed and short set-up times. Can connect two hydraulic torque tools to increase productivity and to save time and money.
- Flexible bolting applications. Compatible with almost all hydraulic torque wrenches, regardless of cylinder size and torque range.

alkitronic® specials


- Low maintenance costs due to the maintenance-free, low-wear and brushless synchronous motor. No magnetic control valves and therefore no wear.
- Modular construction for cost-saving upgrade or parts exchange.
- Individual operation – basic version with manual control.
- Integrated motor protection to avoid damage due to overload.



Technical Data


alkitronic® VELOX infinitely adjustable pressure setting up to 10,000 psi (maximum operating pressure: 10,000 psi)

Specification	alkitronic® VELOX	VELOX Speed Upgrade
Drive electrical / nominal sensitivity	110/230 V, 50/60 Hz, 1600 W	230 V, 50/60 Hz, 2100 W
Protection class	IP65	IP65
Output low pressure area	366 cu.in./min at 2,030 psi	519 cu.in./min at 2,030 psi
Output high pressure area	46 cu.in./min at 10,000 psi	70.15 cu.in./min at 10,000 psi
Tank capacity	4.0 l / 1.06 gal	4.0 l / 1.06 gal
Surrounding temperature	-20° C / -4° F up to +50° C / +122° F	-20° C / -4° F up to +50° C / +122° F
Noise emission	< 76 dB(A)	< 76 dB(A)
Weight incl. oil	52.9 lb	52.9 lb
Dimensions L x W x H (in)	14 x 10 x 22	14 x 10 x 22
Dimensions L x W x H (in) with transport frame	15 x 12 x 22	15 x 12 x 22

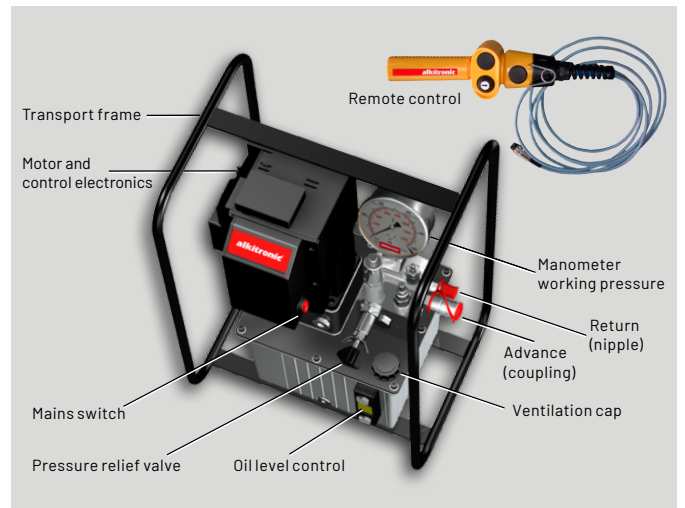

Compatible: Diagram of hydraulic hose connection

alkitronic® VELOX

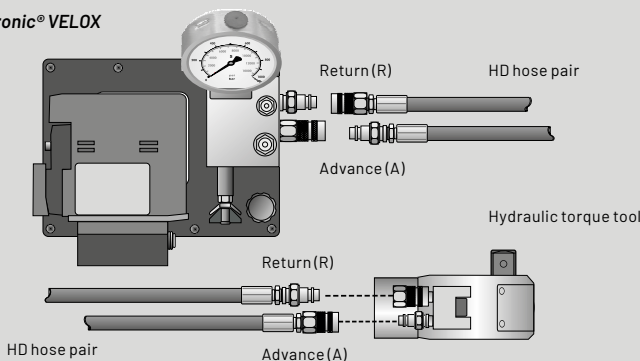

Included in the delivery: hydraulic hoses, 16.4 ft long (DN 6)

Hydraulic torque wrench alkitronic® AT



We recommend our hydraulic torque wrenches for secure and reliable tightening or loosening of heavy bolt connections.

alkitronic®
HOME OF TORQUE POWER

alkitronic® products
Made in Germany by

alki TECHNIK GmbH
Development, Production and
Distribution of Bolting Systems

Unterlettenweg 4
85051 Ingolstadt
Germany

fon +49 841 97499-0
fax +49 841 97499-90

info@alkitronic.com
www.alkitronic.com